
RoofScope®

1000 Opportunity Way, Denver, CO 80202

Project Totals

Total Roof Area	-	**43.53 SQ**
Standard Slope (4:12-6:12)	-	40.63 SQ
Flat Slope (0:12-1:12)	-	1.10 SQ
Low Slope (2:12-3:12)	-	1.80 SQ
High Roof (over 1 story)	-	38.08 SQ
IWB (Ice & Water Barrier)	-	948.10 SF
Roof Planes	-	16
Structures	-	1
Eave	-	330.03 LF
Rake	-	97.22 LF
Flat Drip Edge	-	40.14 LF
Clear Story	-	1.00 LF
Total Perimeter	-	468.39 LF
Ridge	-	36.50 LF
Hip	-	239.05 LF
Valley	-	43.18 LF
Step Flashing	-	142.29 LF
Headwall Flashing	-	67.38 LF

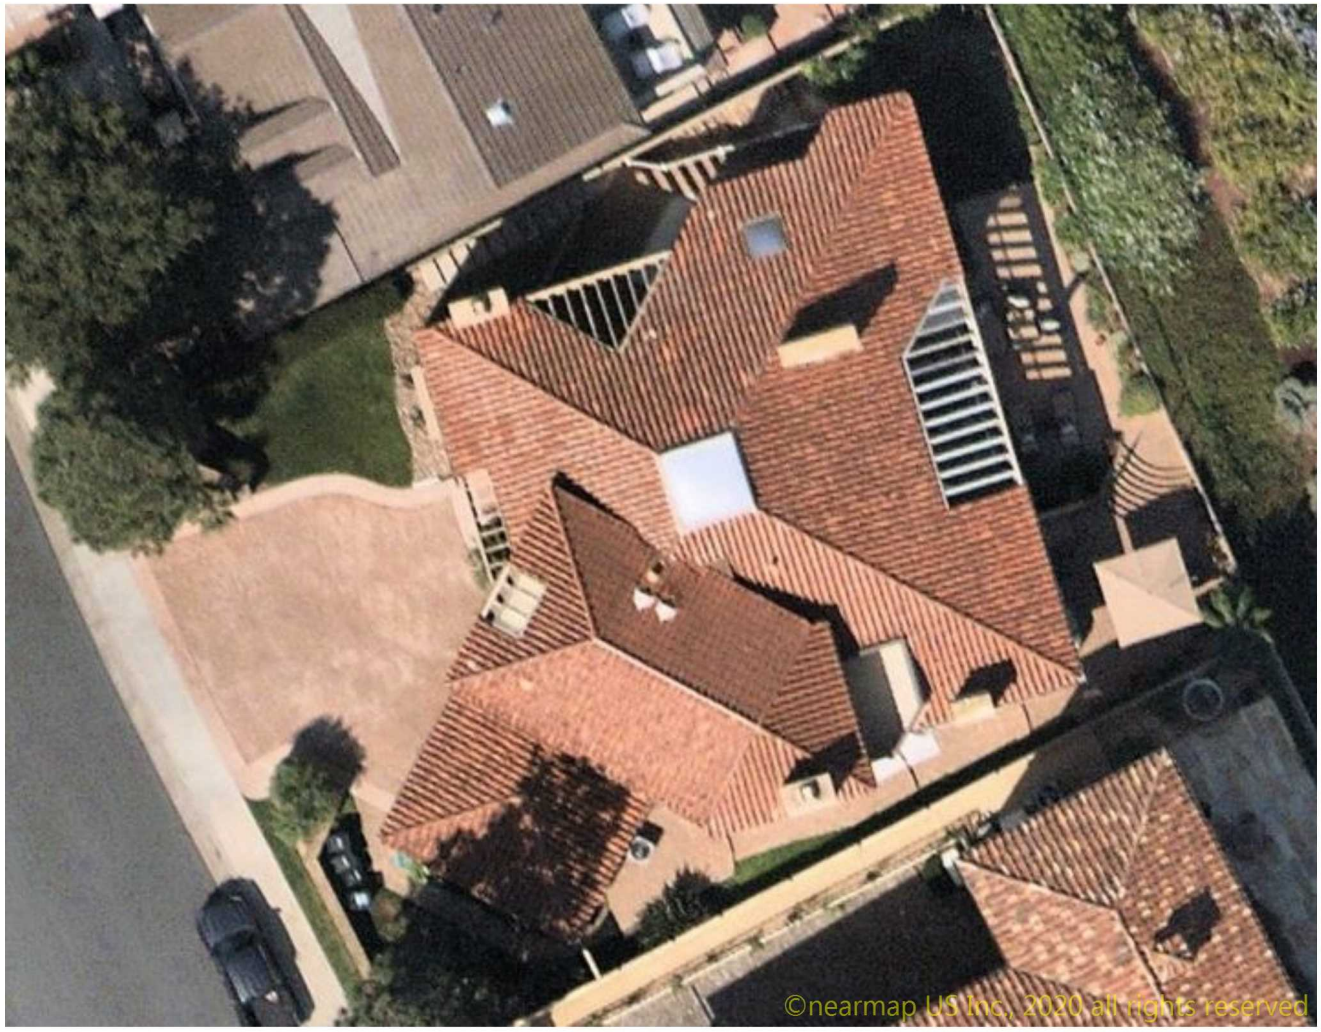


THIS REPORT IS FOR ESTIMATION PURPOSES ONLY. VERIFY ALL DIMENSIONS AND TOTALS BEFORE PURCHASING MATERIALS.
THIS REPORT IS THE PROPERTY OF SCOPE TECHNOLOGIES, INC. AND MAY NOT BE REPRODUCED WITHOUT WRITTEN CONSENT.

ScopeTechnologies

Roof Area Analysis - Structure 1

1000 Opportunity Way, Denver, CO 80202

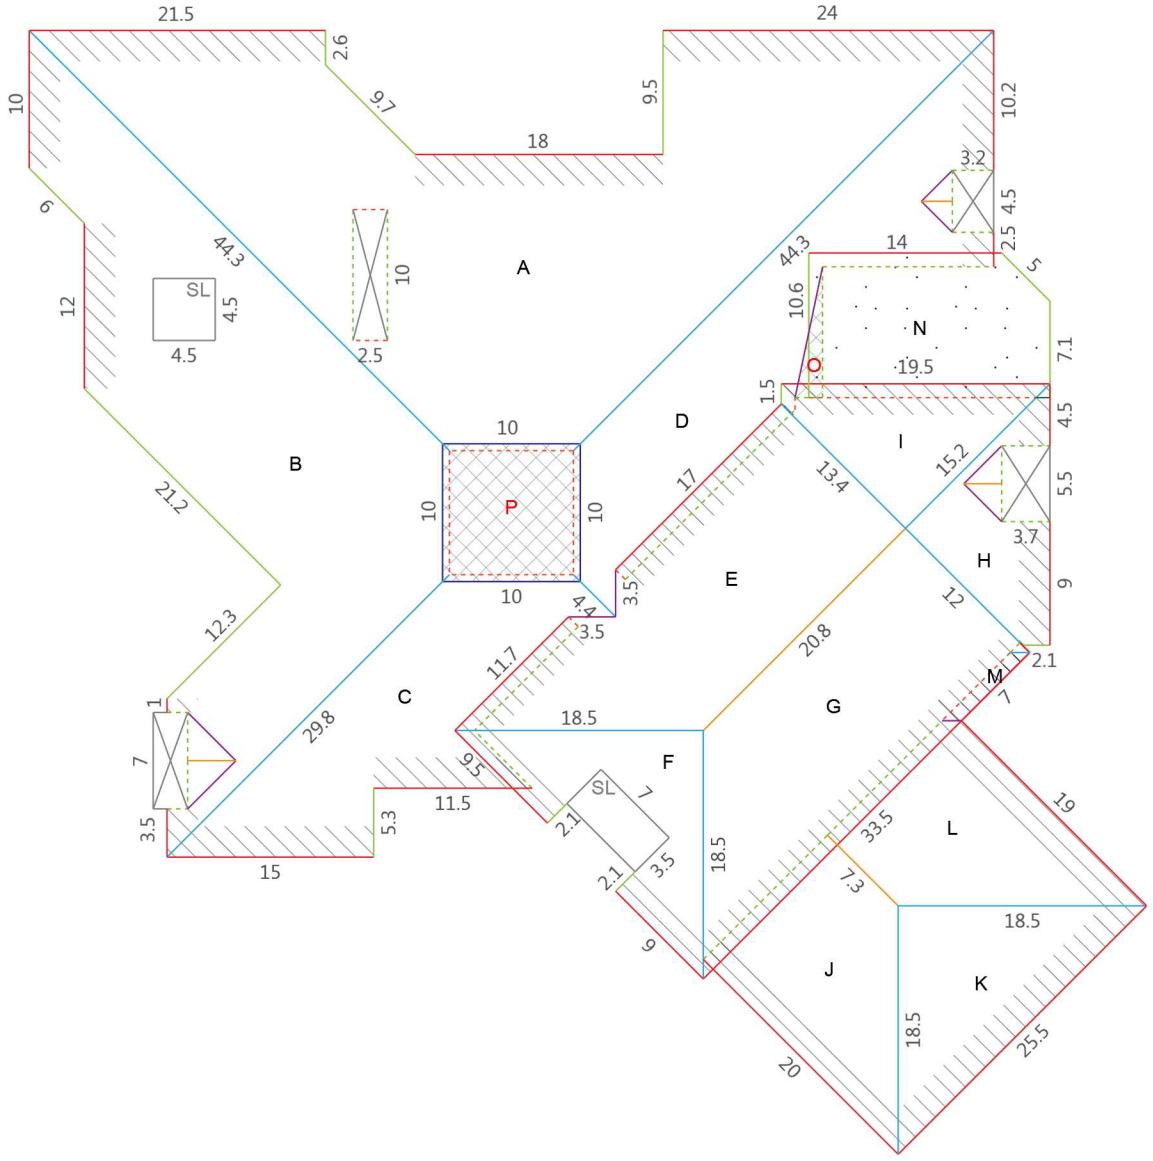

Plane	Area(sf)	Pitch	Slope	High	IWB(sf)
A	1,035	4:12		H	191
B	736	4:12		H	79
C	295	4:12		H	80
D	365	4:12		H	38
E	358	4:12		H	86
F	157	4:12		H	56
G	365	4:12		H	103
H	93	4:12		H	41
I	115	4:12		H	58
J	183	4:12			60
K	171	4:12			76
L	183	4:12			57
M	8	4:12			23
N	180	2:12	L	H	
O	10	1:12	F	H	
P	100	1:12	F	H	

Slope: (S)teep - (L)ow - (F)lat

Totals (SQ)		
1:12	-	1.1
2:12	-	1.8
4:12	-	40.6
Flat	-	1.1
Low	-	1.8
High	-	38.1

Drawing Key

Eave	Hip	Ridge	Parapet	Clear Story	Headwall Flashing	Ice & Water Areas
Rake Edge	Valley	Flat Drip Edge	Coping	Slope Change	Step Flashing	Flat Slope Area

ELEVATION
ROOFING

Elevation Roofing Inc.
969 Watershield Way
Spruceville, Colorado 43003

Prepared By: Bob Ford
(877) 697-2673
your@email.com

Estimate

DATE	11/03/2020
ESTIMATE #	E2019-38112
STRUCTURES	1

1000 Opportunity Way, Denver, CO 80202

Roof

ITEM NAME	QTY	PRICE	AMOUNT
Tearoff Asphalt Roof - Standard Laminated	43.53 SQ	$85.25	$3,710.93
Install Owens Corning Duration Shingle	47.88 SQ	$204.60	$9,796.25
Install OC Deck Defense Roof Underlayment	43.53 SQ	$18.00	$783.54
Install OC WeatherLock G Self-Sealing Ice & Water Barrier	1540.45 SF	$0.79	$1,216.96
Install Owens Corning Starter Strip Shingle	468.39 LF	$0.99	$463.71
Install Owens Corning VentSure 4' Strip Heat & Moister Ridge Vents	275.55 LF	$10.80	$2,975.94
Install Owens Corning DuraRidge H & R Shingles	40.15 LF	$4.60	$184.69
High Roofing Charge - 12' or Greater	38.08 SQ	$24.00	$913.92
Roof Metal - Headwall Flashing	74.12 LF	$1.68	$124.52
Roof Metal - D-Style Rake Edge	106.94 LF	$0.90	$96.25
Roof Metal - Step Flashing	156.52 LF	$1.84	$288.00
Labor - additional trash removal	43.53 SQ	$0.50	$21.77
OSB	43.53 SQ	$32.00	$1,392.96

Notes:

All Work is Completed Per Local Municipality Code

Protect Driveway & Landscape w/ Tarps During Production

Walk Entire Property with Nail Magnet

Subtotal	$21,969.42
Overhead	$1,098.47
Profit	$1,098.47
TOTAL	$24,166.36

ELEVATION
ROOFING

Elevation Roofing

Prepared By: Production Department
(303) 333-9999
production@elevationroofing.com

Work Order

DATE	11/03/2020
ORDER #	W2020-41994
FOR	Roof
STRUCTURES	1

Property: 1000 Opportunity Way, Denver, CO 80202

Roof			
QTY	PRODUCT	MANUFACTURER	COLOR
132 BDL	TruDefinition Duration Shingles	Owens Corning	Onyx Black
18 BOX	DecoRidge Hip & Ridge Shingles	Owens Corning	Onyx Black
9 BDL	Starter Strip	Owens Corning	
8 RL	Deck Defense Roof Underlayment	Owens Corning	
6 RL	WeatherLock G	Owens Corning	
8 PC	VentSure	Owens Corning	
26 PC	2" x 2" Drip Edge	Generic	Black
11 PC	D-Style Drip Edge	Generic	Black
6 BDL	8" x 8" Step Flashing	Generic	
8 PC	Headwall Flashing	Generic	
3 EA	3-1" Pipe Boot	Generic	
1 EA	3-4" Pipe Boot	Generic	
1 BOX	1 1/4" Plastic Cap Nails	Generic	
2 BOX	1 1/4" Coil Nails	Generic	
2 TB	Clear Caulking	Geocel	
2 TB	Roof Cement	Generic	
2 CAN	Spray Paint	Generic	Black

Notes:

Please Roof Load All Materials

Powered by: ProDocs
Get Started With ProDocs Today: Call us at 877.My.Scope